



Willamette Valley Company  
www.wilvaco.com  
800.333.9826

Partnering through service,  
innovation, and integrity

# FastPatch HPRE-MD

High Performance Rail Encapsulator – Meter Dispensed

## DESCRIPTION

FastPatch HPRE-MD is a composite polyurethane, rail encapsulation system with patent pending integrated aggregate. HPRE-MD is specifically designed for embedded rail applications and provides excellent electrical isolation, resilience, and vibration and sound damping. HPRE-MD is dispensed by WVCO PRE-TEC division WV-651.

## WHERE TO USE

- Embedded Track - between rail and concrete
- Special Track - intersection and stations
- Concrete Repair – spalls and large cracks

## FEATURES AND BENEFITS

- Rapid cure - fast return to service
- 100% Solids, No Odor or VOC
- Integrated Aggregate – no need for gravel bags
- Excellent Concrete Adhesion
- Electrical Isolation
- Sound and Vibration Damping
- Self leveling
- 4.0 gal/min application rate from WV-651 at 70°F

## PACKAGING

250-Gallon Totes

## COLORS

Gray

## SHELF LIFE

1 year when properly stored.

## STORAGE

Store and ship this product in clean, dry, low-humidity, and shaded or covered environments between 50 and 90°F (10-32°C)



## TYPICAL PROPERTIES

HPRE Full Composite Properties (polymer and aggregate)		
Adhesion to concrete, psi (MPa), ASTM D7234, unprimed		≥350 (2.4)*
Adhesion to steel rail, psi (MPa), ASTM D4541, unprimed		≥300 (2.1)
Elongation, %, ASTM D412, full cure		≥20
Tensile strength, psi, ASTM D412, full cure		400
Thermal compatibility to concrete, ASTM C884		pass
Surface resistivity, Ω/square, ASTM D257-14 (500V)		4.56E+14
Volume resistivity, Ω*cm, ASTM D257-14 (500V)		1.66E+14
working time, min.	tack-free time, min.	Temp.
4-5	15	104°F (40°C)
8	30	77°F (25°C)
15	60	59°F (15°C)
Ultimate hardness, Shore D, ASTM D2240		55-60
VOC, lbs/gal (g/L), ASTM D2369		0
Viscosity, cP, ASTM D4878, Mixed		6,000
Service temperature, °F (°C)		-40 - 185 (-40 - 85)
ASTM C579 Compression Strength vs Cure time		
	2" cubes	3"x6" cylinders
3 hours RT	1,500 psi	810 psi
24 hours RT	1,600 psi	1,300 psi
1 week RT	2,900 psi	2,100 psi

\*Concrete cohesive failure mode. Limiting factor for HPRE concrete adhesion is the substrate quality.

## HPRE Polymer Only Properties (no aggregate)

Compressive set, %, ASTM D395 3 <sup>rd</sup> incremental set (24hr 70°C)	5
Shore hardness, ASTM D2240, full cure	85-90A, 40-45D
Elongation, %, ASTM D412, full cure	≥ 75
Tensile strength, psi, ASTM D412, full cure	≥ 900

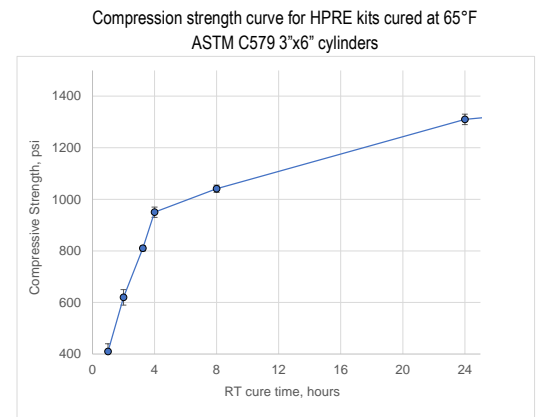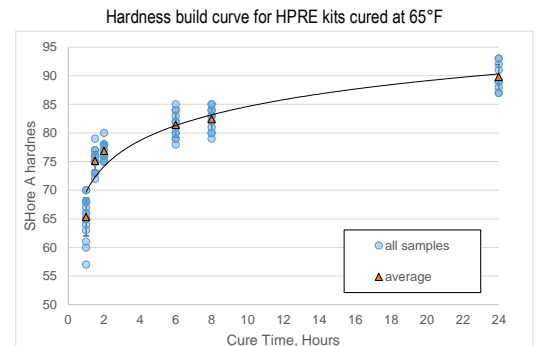

**HPRE Chemical Resistance, ASTM D471, 70°F, 7 Day Immersion**

	$\Delta\%$ volume	$\Delta\%$ weight
water	no change	0.73 $\pm$ 0.09
10% NaCl	no change	0.87 $\pm$ 0.10
5% NaOH	no change	0.65 $\pm$ 0.09
10% CaCl <sub>2</sub>	no change	0.70 $\pm$ 0.10
5% H <sub>2</sub> SO <sub>4</sub>	no change	0.635 $\pm$ 0.019
IRM-901 (oil #1)	no change	0.24 $\pm$ 0.05
IRM-902 (oil #2)	no change	0.32 $\pm$ 0.02
IRM-903 (oil #3)	no change	0.443 $\pm$ 0.012
Jet A	no change	0.59 $\pm$ 0.03
JP-4	2.2 $\pm$ 1.0	1.5 $\pm$ 0.2

**APPLICATION INSTRUCTIONS**

**SURFACE PREPARATION:**

*Concrete*

1. The concrete must be structurally sound, clean, and the surface should be dry. HPRE can be applied to concrete newer than 28 days and in some cases as soon as 24 hours from when the concrete was poured. Contact your WVCO representative for more details.
2. Concrete surfaces must be free of dirt, moisture, loose particles, oil, asphalt, tar, paint, wax, rust, waterproofing and curing/parting compounds, membranes, and any previously installed materials or other foreign matter. Laitance and efflorescence must be removed prior to installation.
3. Clean concrete surfaces by grinding, abrasive blasting, wire brushing, saw cutting, or other appropriate method.

*Steel*

1. Steel surfaces must be cleaned before blasting according to SSPC-SP1. Remove any sharp edges and other surface imperfections.
2. Dry abrasive blast surface according to SSPC SP-6/NACE No. 3 Commercial Blast (minimum).
3. Test the surface for non-visible soluble salt contamination according to NACE 6G186. If necessary treat with CHLOR\*RID or equivalent salt remover until less than 3ug/cm<sup>2</sup> is detected.

**PRIMING:**

1. Priming all surfaces is always recommended as it will optimize adhesion and durability. Prime with POLYQuik® POLYPRIME or other WVCO approved primer. Contact WVCO for more details about appropriate primer selection.
2. Refer to the primer Technical Data Sheet and the [POLYQuik® Primers Installation Guideline](#) for detailed primer application instructions.

**PROCESSING:**

1. Use WVCO/Pre-Tec (or equivalent) meter at 6:1 volume ratio. Always use approved static mix tubes
2. For specific questions about your metering equipment contact your WVCO representative or customer support.
3. Whenever possible, condition all HPRE components (resin, iso, and aggregate) to 70°F (21°C) before application.
4. At ambient temperatures  $\leq$ 40°F (5°C), HPRE components may be conditioned to 100°F (38°C) to aid in cure speed.
5. Mechanically mix the HPRE resin component for at least 30 minutes or until well mixed before application. It is particularly important to mix the HPRE resin if it has been allowed to sit in storage for an extended period of time.
6. Test the performance of the meter and HPRE before applying into the work area. It is recommended a small portion of material is dispensed into a cup and the material cure time and color/mixing monitored for uniformity and conformance at the start of each work period. Do not proceed with application into the work area if the initial test does not cure properly.
7. Static mix tubes should be replaced if application stops for longer than 5 minutes or if material flow is restricted.
8. Rail systems and geometries are varied. It is the responsibility of the installer to determine the most appropriate application method for the specific work project parameters.

NOTE: HPRE is cured to the touch ('tack-free') by approx. 60 minutes at 70°F (21°C). Colder temperatures will extend the cure time, warmer temperatures will shorten the cure time.

NOTE: HPRE surface may discolor with UV exposure. UV discoloration does not impact any aspect of material performance.

NOTE: WVCO recommends installing a transverse control joint every 10-12 ft. for large contiguous HPRE installations. Contact your WVCO representative for more details on recommended installation procedures and practices.

**HEALTH AND SAFETY**

Before handling, you should become familiar with the Safety Data Sheet (SDS) regarding the risks and safe use of this product. To obtain an SDS, please call 800-333-9826 or send an email to: [msds@wilvaco.com](mailto:msds@wilvaco.com).

DISCLAIMER OF WARRANTY  
TEST RESULTS ARE TO BE CONSIDERED AS REPRESENTATIVE OF CURRENT PRODUCTION AND SHOULD NOT BE TREATED AS SPECIFICATIONS. WHILE ALL THE INFORMATION PRESENTED IN THIS DOCUMENT IS BELIEVED TO BE RELIABLE AND TO REPRESENT THE BEST AVAILABLE DATA ON THESE PRODUCTS, NO GUARANTEE, WARRANTY, OR REPRESENTATION IS MADE, INTENDED, OR IMPLIED AS TO THE CORRECTNESS OR SUFFICIENCY OF ANY INFORMATION, OR AS TO THE SUITABILITY OF ANY CHEMICAL COMPOUNDS FOR ANY PARTICULAR USE, OR THAT ANY CHEMICAL COMPOUNDS OR USE THEREOF ARE NOT SUBJECT TO A CLAIM BY A THIRD PARTY FOR INFRINGEMENT OF ANY PATENT OR OTHER INTELLECTUAL PROPERTY RIGHT. EACH USER SHOULD CONDUCT A SUFFICIENT INVESTIGATION TO ESTABLISH THE SUITABILITY OF ANY PRODUCT FOR ITS INTENDED USE. PROPER APPLICATION IS THE RESPONSIBILITY OF THE USER. AS WITH ANY PRODUCT THE USE OF THIS PRODUCT IN A GIVEN APPLICATION MUST BE TESTED (INCLUDING BUT NOT LIMITED TO FIELD TESTING) IN ADVANCE BY THE USER TO DETERMINE SUITABILITY. TESTING IS THE REQUIREMENT OF BOTH ENGINEERS AND CONTRACTORS ALIKE. WVCO DOES NOT WARRANT THE APPLICATION UNDER ANY OR ALL CIRCUMSTANCES.

**WILLAMETTE VALLEY COMPANY**  
[www.wilvaco.com](http://www.wilvaco.com) [info@wilvaco.com](mailto:info@wilvaco.com)

**DIVISIONS**

**WESTERN DIVISION**

990 Owen Loop North  
PO Box 2280  
Eugene, OR 97402  
Tel 541.484.9621  
[www.POLYQUIK.com](http://www.POLYQUIK.com)  
[www.SPIKEFAST.com](http://www.SPIKEFAST.com)

**EASTERN DIVISION**

6662 Marbut Road  
Lithonia, GA 30058  
Tel 888.878.9826

**MIDWEST DIVISION**

1549 Hwy 2  
Two Harbors, MN 55616  
Tel 218.834.3922

**PRECISION TECHNOLOGIES DIVISION**

990 Owen Loop North  
Eugene, OR 97402  
Tel 541.484.2368  
[www.pre-tec.com](http://www.pre-tec.com)

**SOUTHERN DIVISION**

100 Dixie Mae Drive  
PO Box 4450  
Pineville, Louisiana 71361  
Tel 318.640.5077

**SUBSIDIARIES**

**ECLECTIC PRODUCTS INC.**

Corporate Office  
990 Owen Loop North  
Eugene, OR 97402  
Tel 541.284.4667  
[www.eclecticproducts.com](http://www.eclecticproducts.com)

**IDAHO MILL & GRAIN**

445 North 430 West Hwy  
PO Box 188  
Malad City, Idaho 83252  
Tel 208.766.2206

**TAPEL WILLAMETTE LTD. S.A.**

Av. Estero La Posada 3625  
Parque Industrial Coronel  
Coronel, Chile  
Tel 011.56.41.2.928.100  
[www.tapel.cl](http://www.tapel.cl)



W07-R&D-TDS-113  
REV 00  
Revision Date: July 2018